








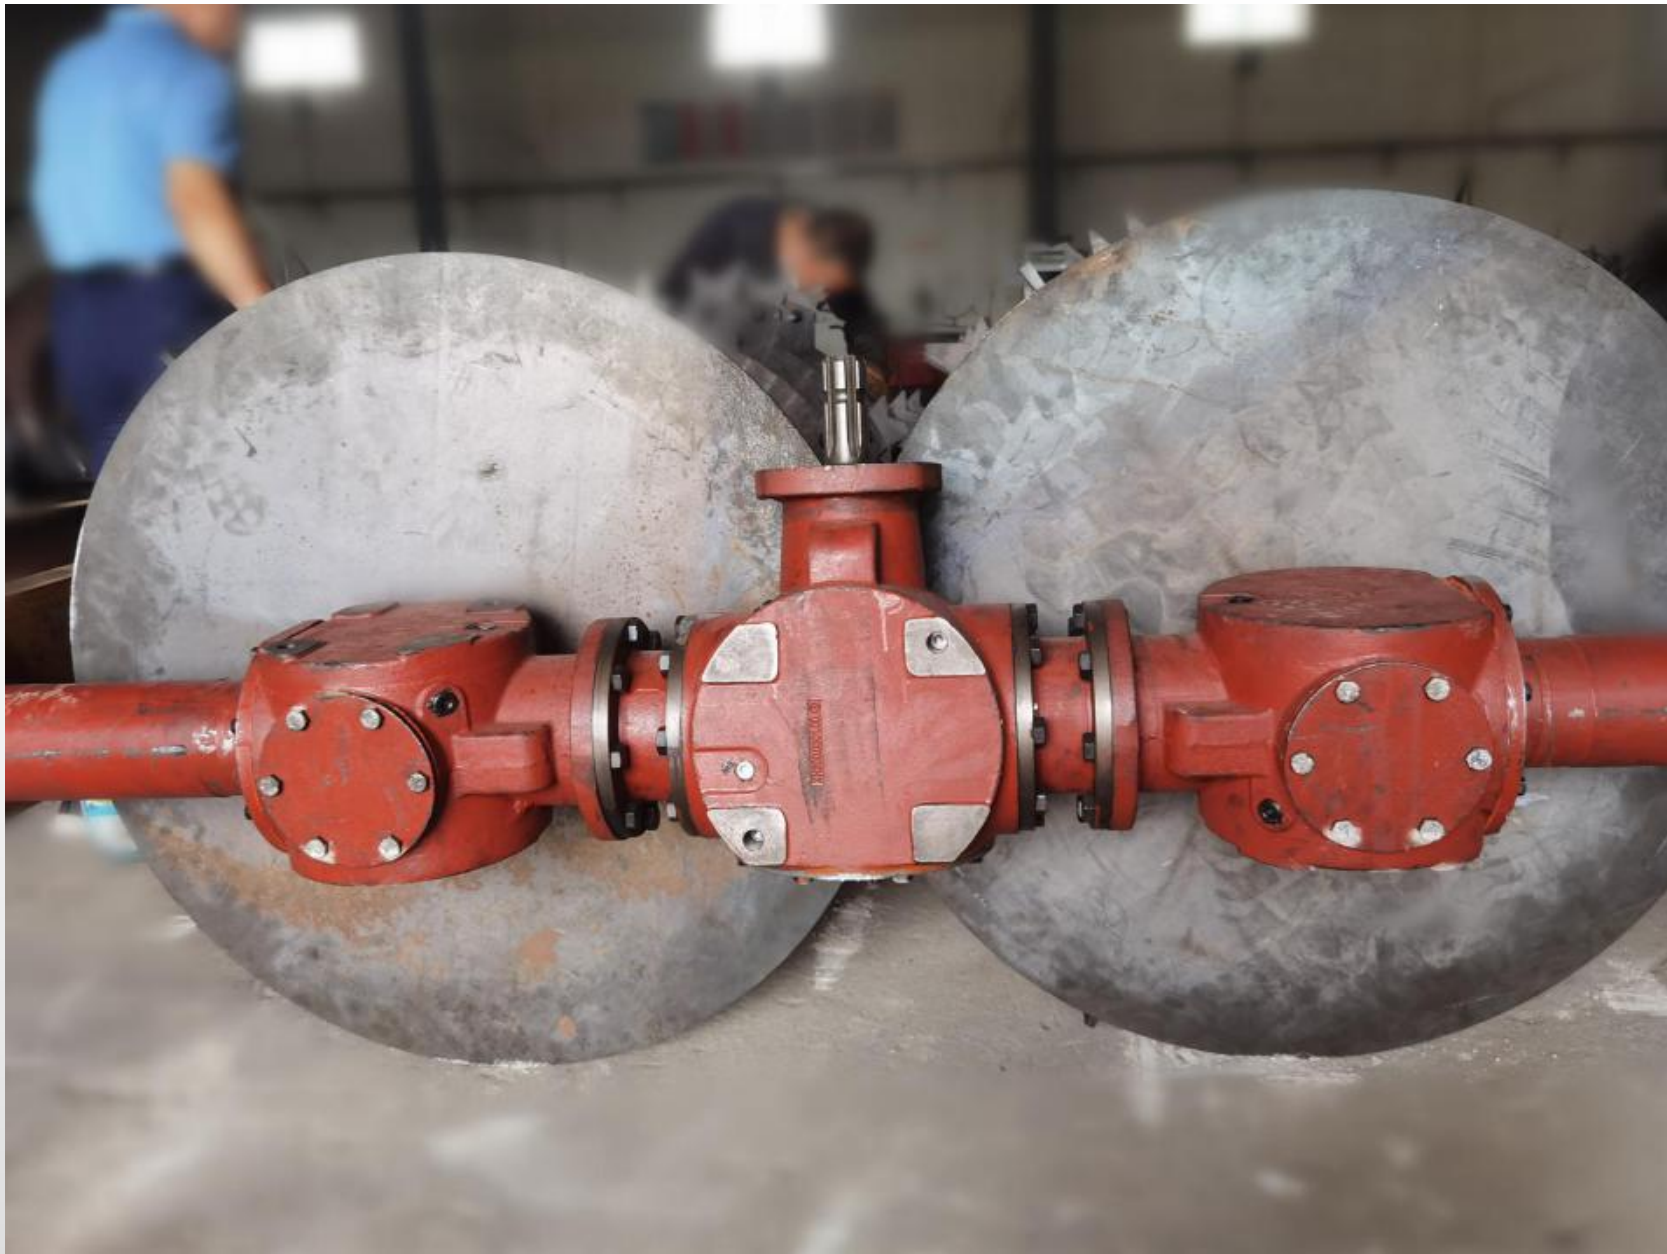

Gearbox For Beater Driving



85HP / 62.5Kw

Shaft distance 670mm,

Overall length 1500mm,

Input 1000rpm, output 422rpm,

Speed ratio 2.367:1.

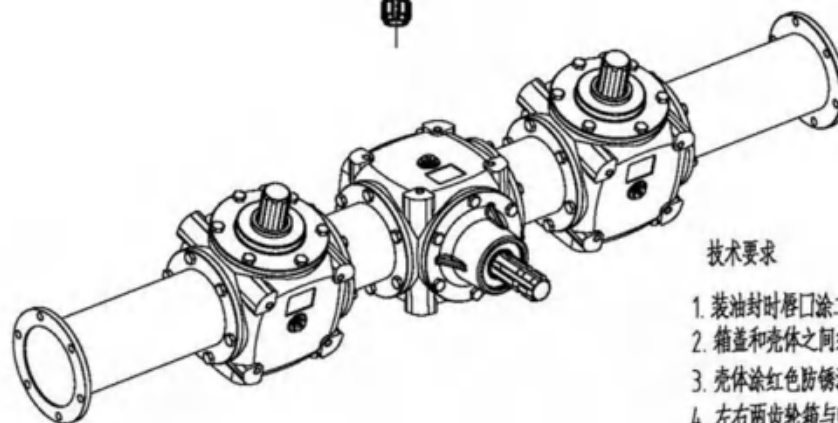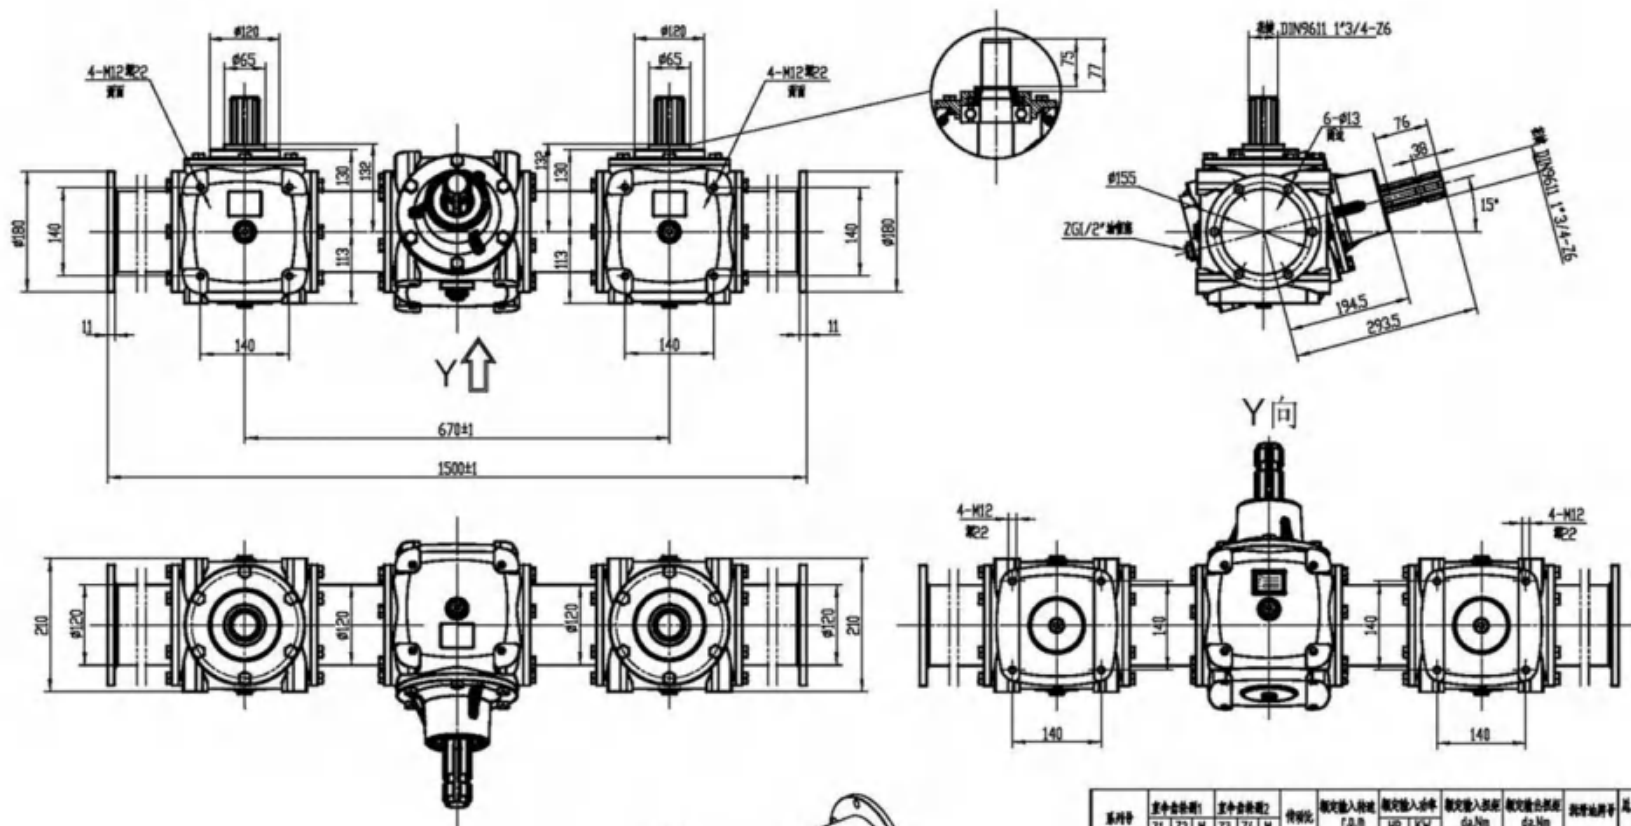

技术要求

1. 装油封时唇口涂二硫化钼油脂。
2. 箱盖和壳体之间须涂硅酮密封胶。
3. 壳体涂红色防锈漆。
4. 左右两齿轮箱与中间齿轮箱夹角为15°。


系列号	定中齿数Z1		定中齿数Z2		传动比	额定输入功率		额定输入功率		额定输入功率		额定输入功率		润滑油牌号	其他
	Z1	Z2	Z1	Z2		r.p.m	kw	hp	kw	hp	kw	hp	kw		
1052010	13	20	7.2	13	20	7.2	2.367:1	1000	85	62.5	59.6	135	SAE 98EP		

图
样
说
明
书

422rpm

1000rpm

INPUT





Gearbox For Beater Driving


85HP / 62.5Kw

Shaft distance 850mm,

Overall length 1850mm,

Input 1000rpm, output 422rpm,

Speed ratio 2.367:1.

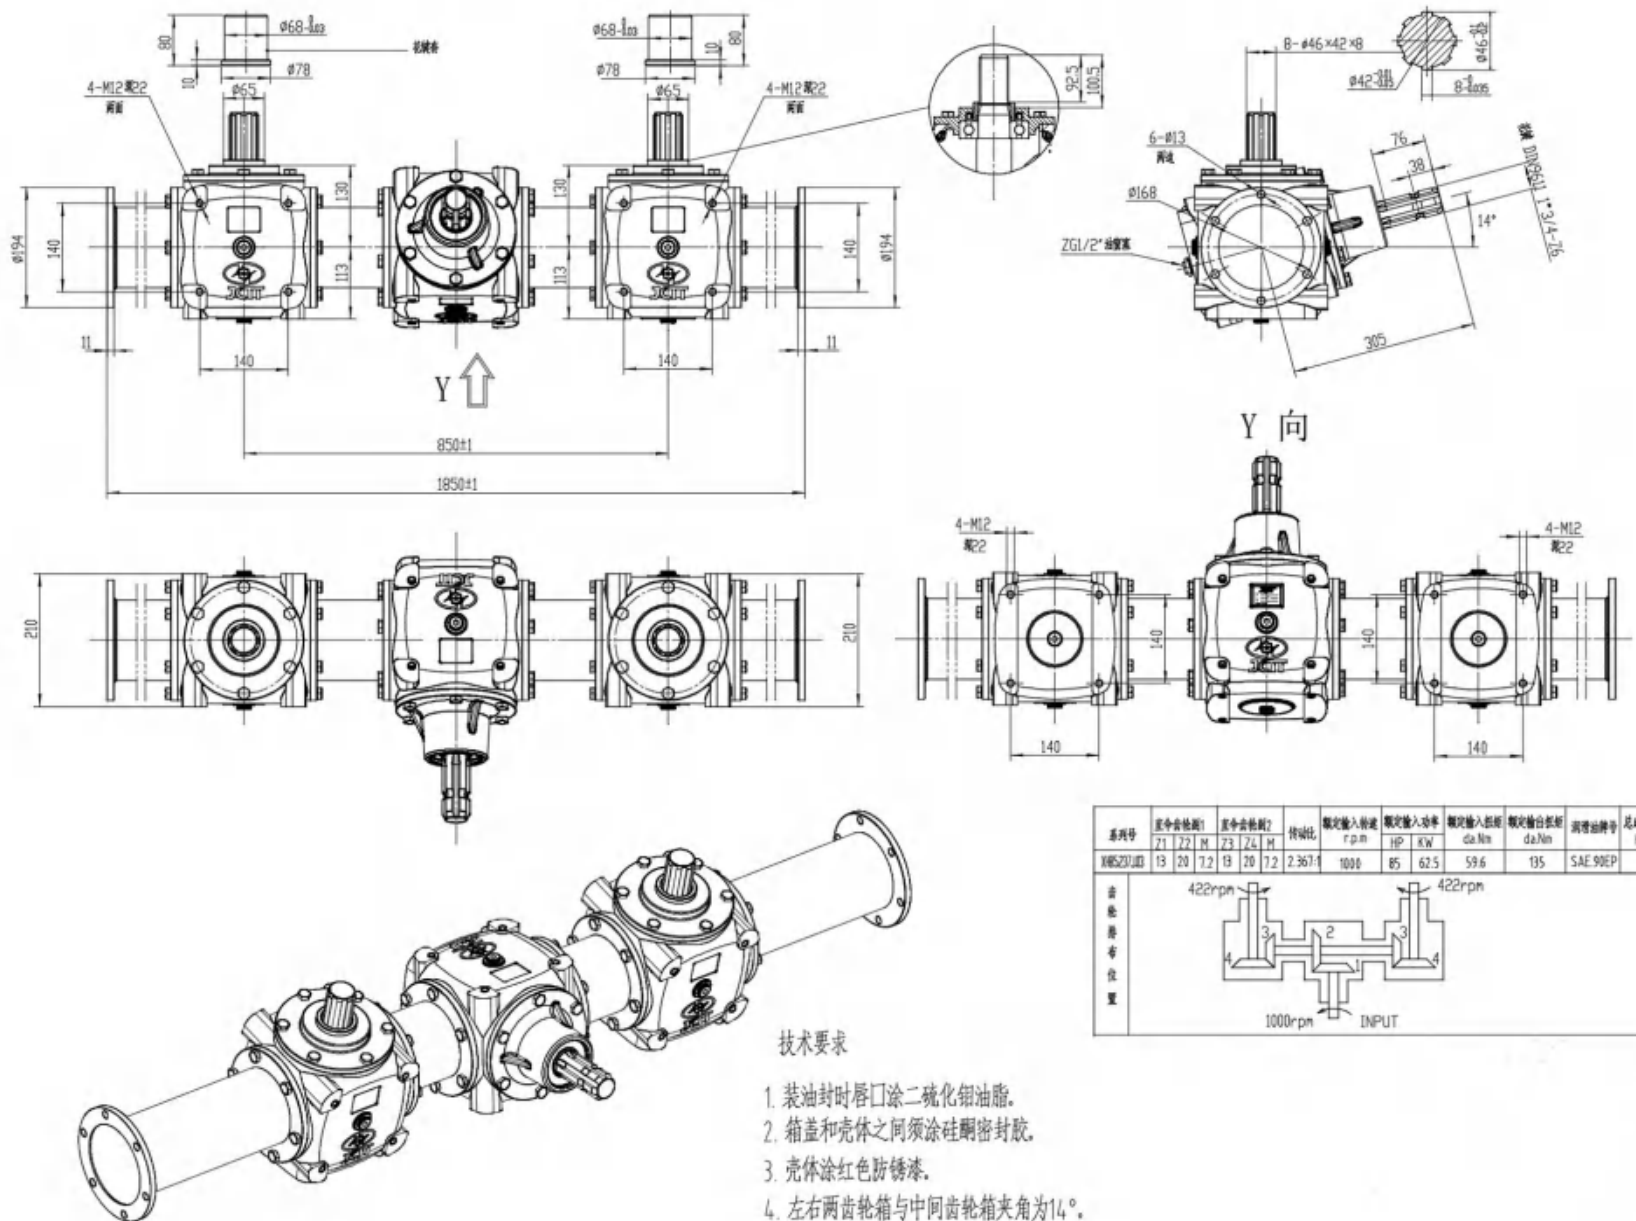



Gearbox For Beater Driving

200HP / 150Kw


Shaft distance 910mm,

Overall length 2000mm,



Input 1000rpm, output 422rpm,

Speed ratio 2.367:1.


218Kgs

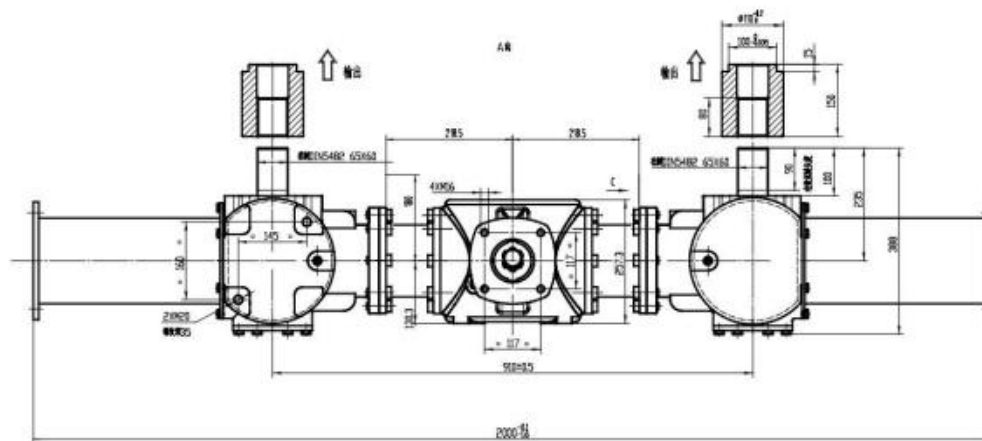


K ↑

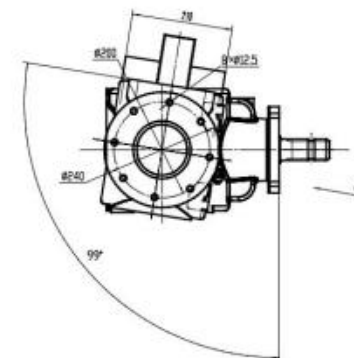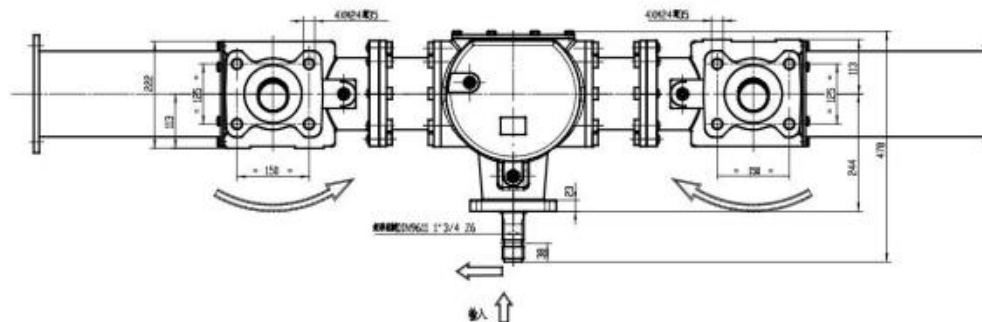

K向



型号	输入功率	输入转速	输出转速	速比	重量
200HP	150KW	1000rpm	422rpm	2.367:1	218kg





Gearbox For Beater Driving

200HP / 150Kw


Shaft distance 910mm,

Overall length 2380mm,


Input 1000rpm, output 379rpm,

Speed ratio 2.64:1.


215Kgs

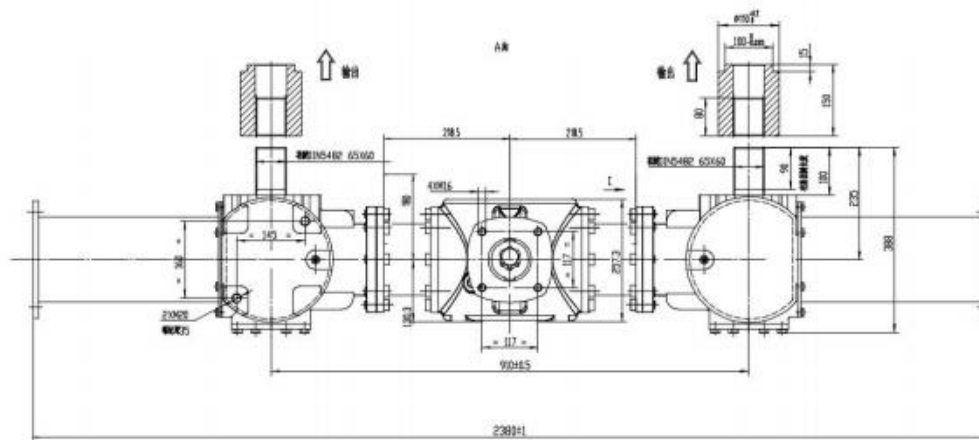


K↑

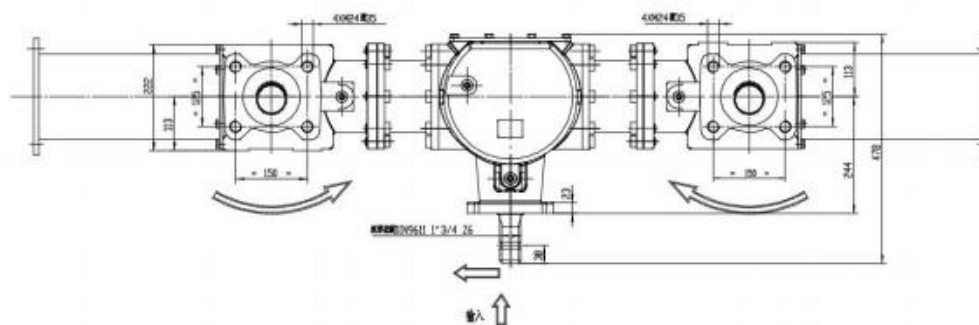

输入↑

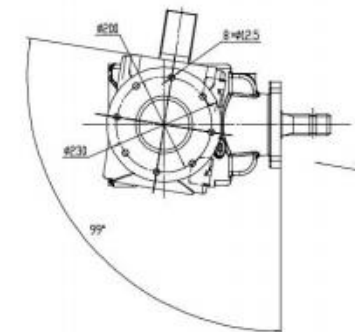


K向




型号	输入功率	输入转速	输出转速	速比	重量
21	22	23	24	25	26
10	11	12	13	14	15
21	22	23	24	25	26
10	11	12	13	14	15

输入 3 2 1 输出





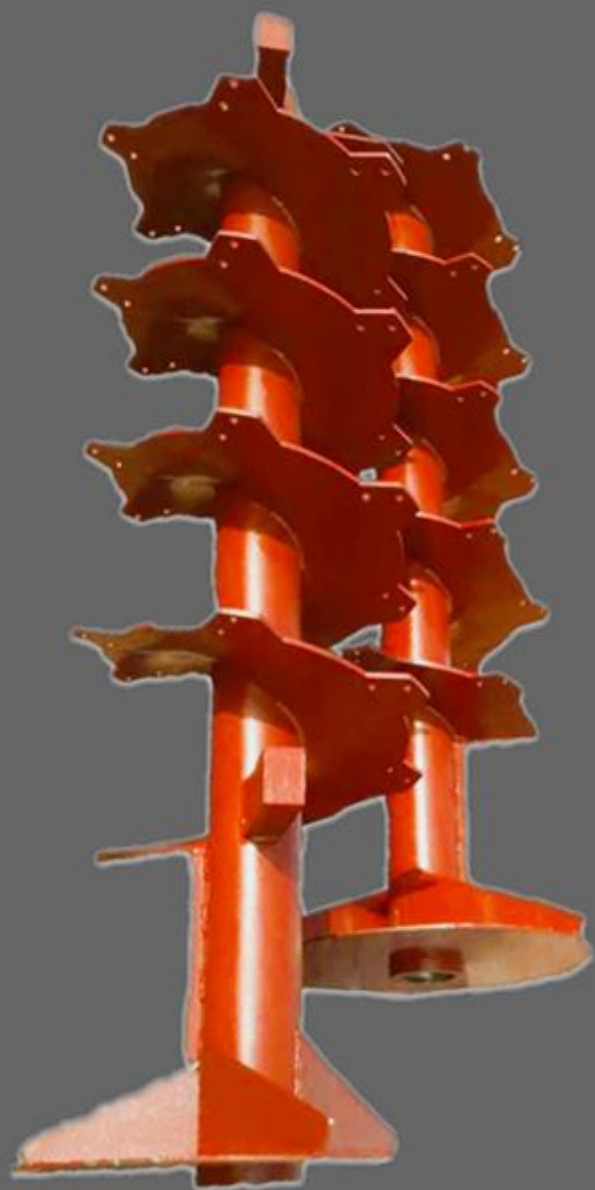

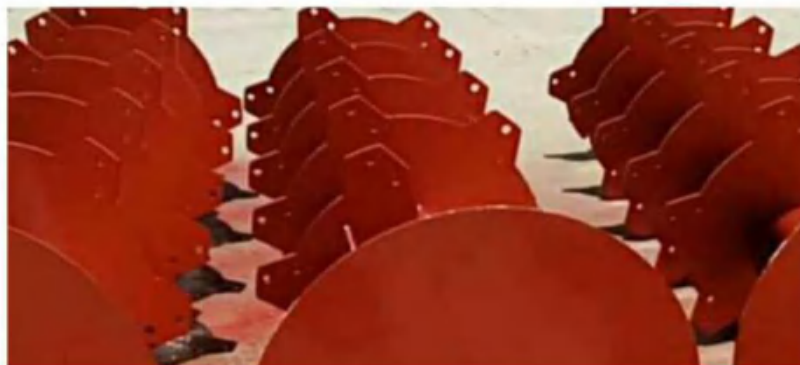





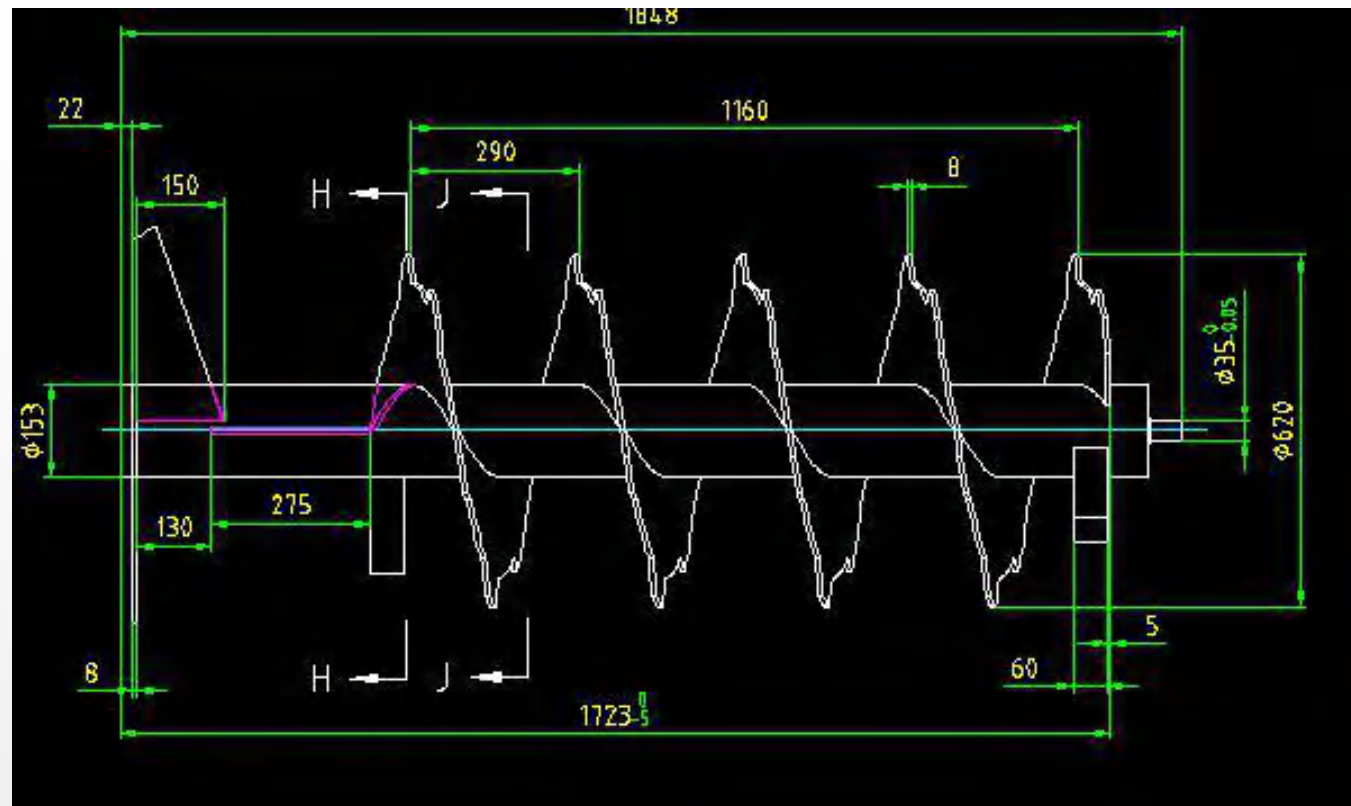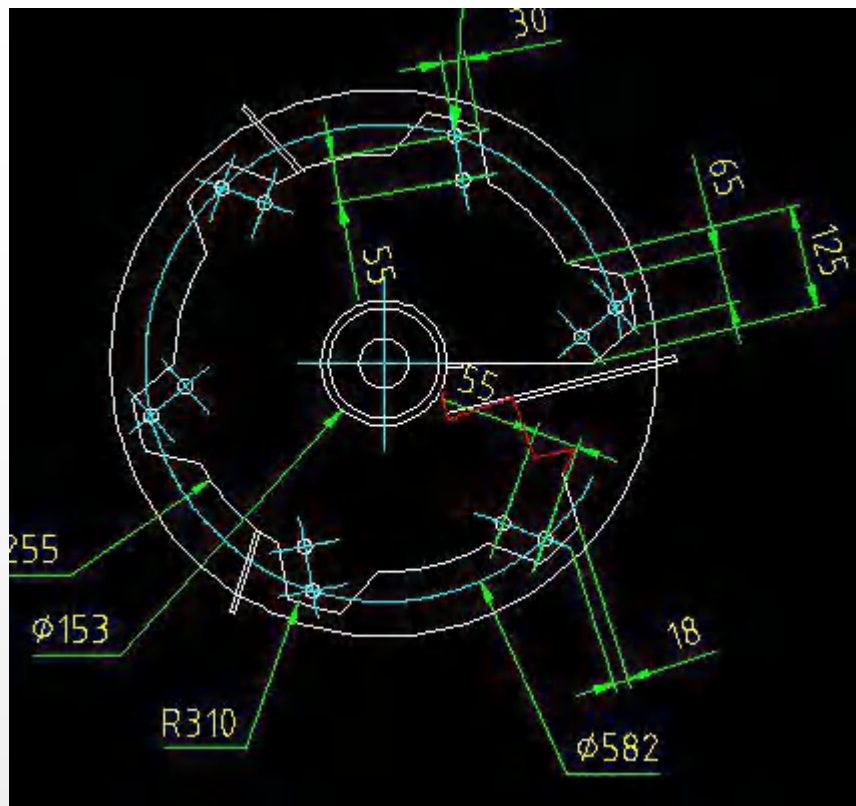

Spec. and dimension customized available.

Welcome your inquiry.

Manure Spreader Vertical Auger Beater

kitty@somebiz.net

WhatsApp / Wechat / Cell: +86-13131847375